


Hot water Boilers – biofuel boilers

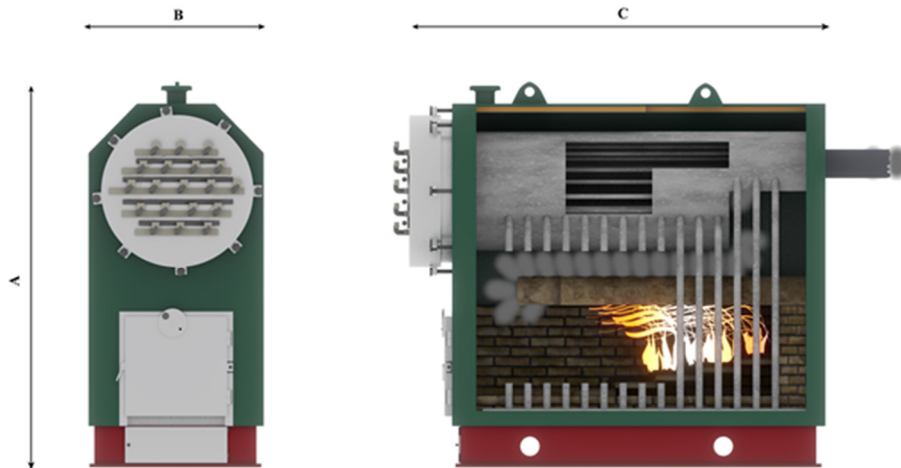

Efficiency: 85-90%
 Fuel moisture: 23-55%
 Temperature: 110C oder 130C

Type	Power	Pressure	Water capacity	Weight	Height A	Width B	Length C
	kW	bar	m ³	T	mm	mm	mm
WET-100MG	100	6	1,24	12,2	2880	1700	3515
WET-200MG	200	10	1,24	12,2	2880	1700	3515
WET-300MG	300	10	1,70	12,8	2880	1700	4335
WET-500MG	500	10	1,70	12,9	3145	1700	4335
WET-800MG	800	10	3,23	16,8	3340	1740	4730
WET-1000MG	1000	10	3,23	17,3	3735	1740	4730
WET-1500MG	1500	10	4,60	22,0	4325	1900	5345
WET-2000MG	2000	10	5,40	28,0	4615	2400	5720
WET-2500MG	2500	10	6,70	35,0	5010	2400	6540
WET-3000MG	3000	10	7,80	43,9	5380	2700	6800